Flash the LED Ex1

Jun 2026

Introduction

In our first Micro Python example, we saw how to turn on and off the onboard LED on the Pi Zero. But what is really cool to do is to flash the LED on and off. This means we can use the LED as an indicator of an error, or that something is running etc.

Lets write some more code in Thonny

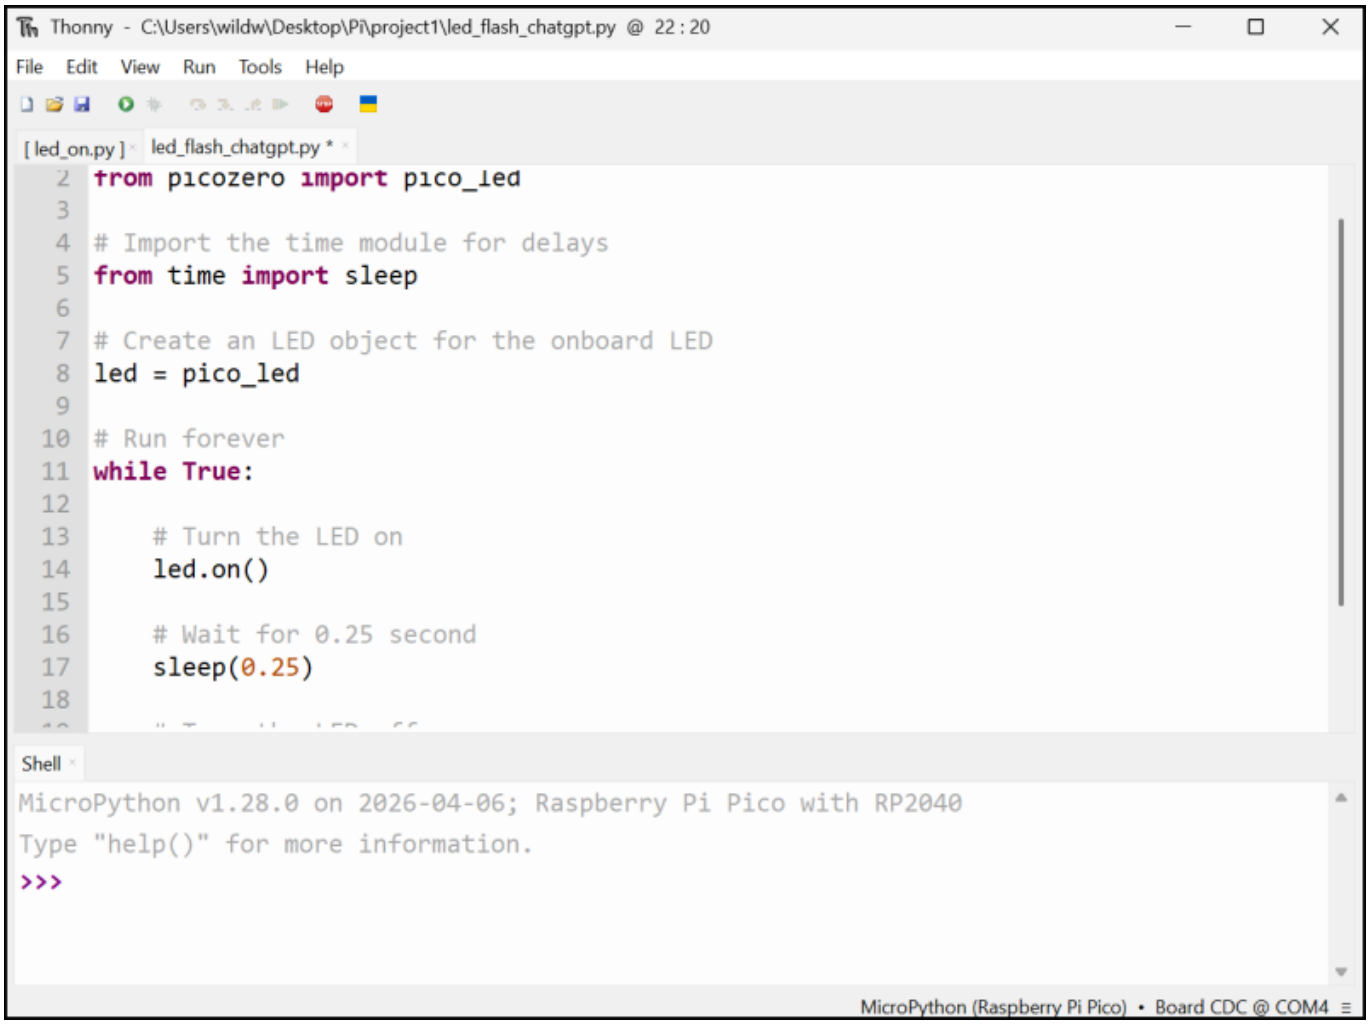

Here is the full Micro Python code that we are using.

download

```
# Import the picozero LED class
from picozero import pico_led

# Import the time module for delays
from time import sleep
```

```
# Create an LED object for the onboard LED
led = pico_led

# Run forever
while True:

    # Turn the LED on
    led.on()

    # Wait for 0.25 second
    sleep(0.25)

    # Turn the LED off
    led.off()

    # Wait for 0.25 second
    sleep(0.25)
```

In this code we are using a **Loop**. The While True: runs forever, and loops around the four lines of code. The comments should make this Micro Python code very easy to understand.

From:
https://wiki.alanwalker.uk/ - **WalkerWiki - wiki.alanwalker.uk**

Permanent link:
https://wiki.alanwalker.uk/doku.php?id=flash_the_led_ex1&rev=1781304739

Last update: **2026/06/12 22:52**