

Waveshare RP2040 Zero

Jun 2026



Introduction

The RP2040-Zero mini development board is equipped with a Type-C female port, utilizes the RP2040A developed by Raspberry Pi as the core, and leading out all unoccupied pins in a very small form factor. Using castellated processing technology, it can be welded onto your custom board.


Features

- RP2040 microcontroller chip officially designed by Raspberry Pi
- Dual-core ARM Cortex M0+ processor, flexible clock running up to 133 MHz
- Built-in 264KB SRAM and 2MB Flash
- Type-C connector, keeps it up to date, easier to use
- Castellated module allows soldering directly to carrier boards
- USB1.1 host and device support
- Low-power sleep and dormant modes
- Drag-and-drop programming using mass storage over USB
- 29 GPIO pins of RP2040 (20 can be led out through pin headers, the rest can be led out only by soldering)

SPI × 2
I2C × 2
UART × 2
12-bit ADC × 4
Controllable PWM channel × 16

- Accurate clock and timer on-chip
- Temperature sensor
- On-chip accelerated floating-point library
- 8 × Programmable I/O (PIO) state machines for custom peripheral support

Pin Out

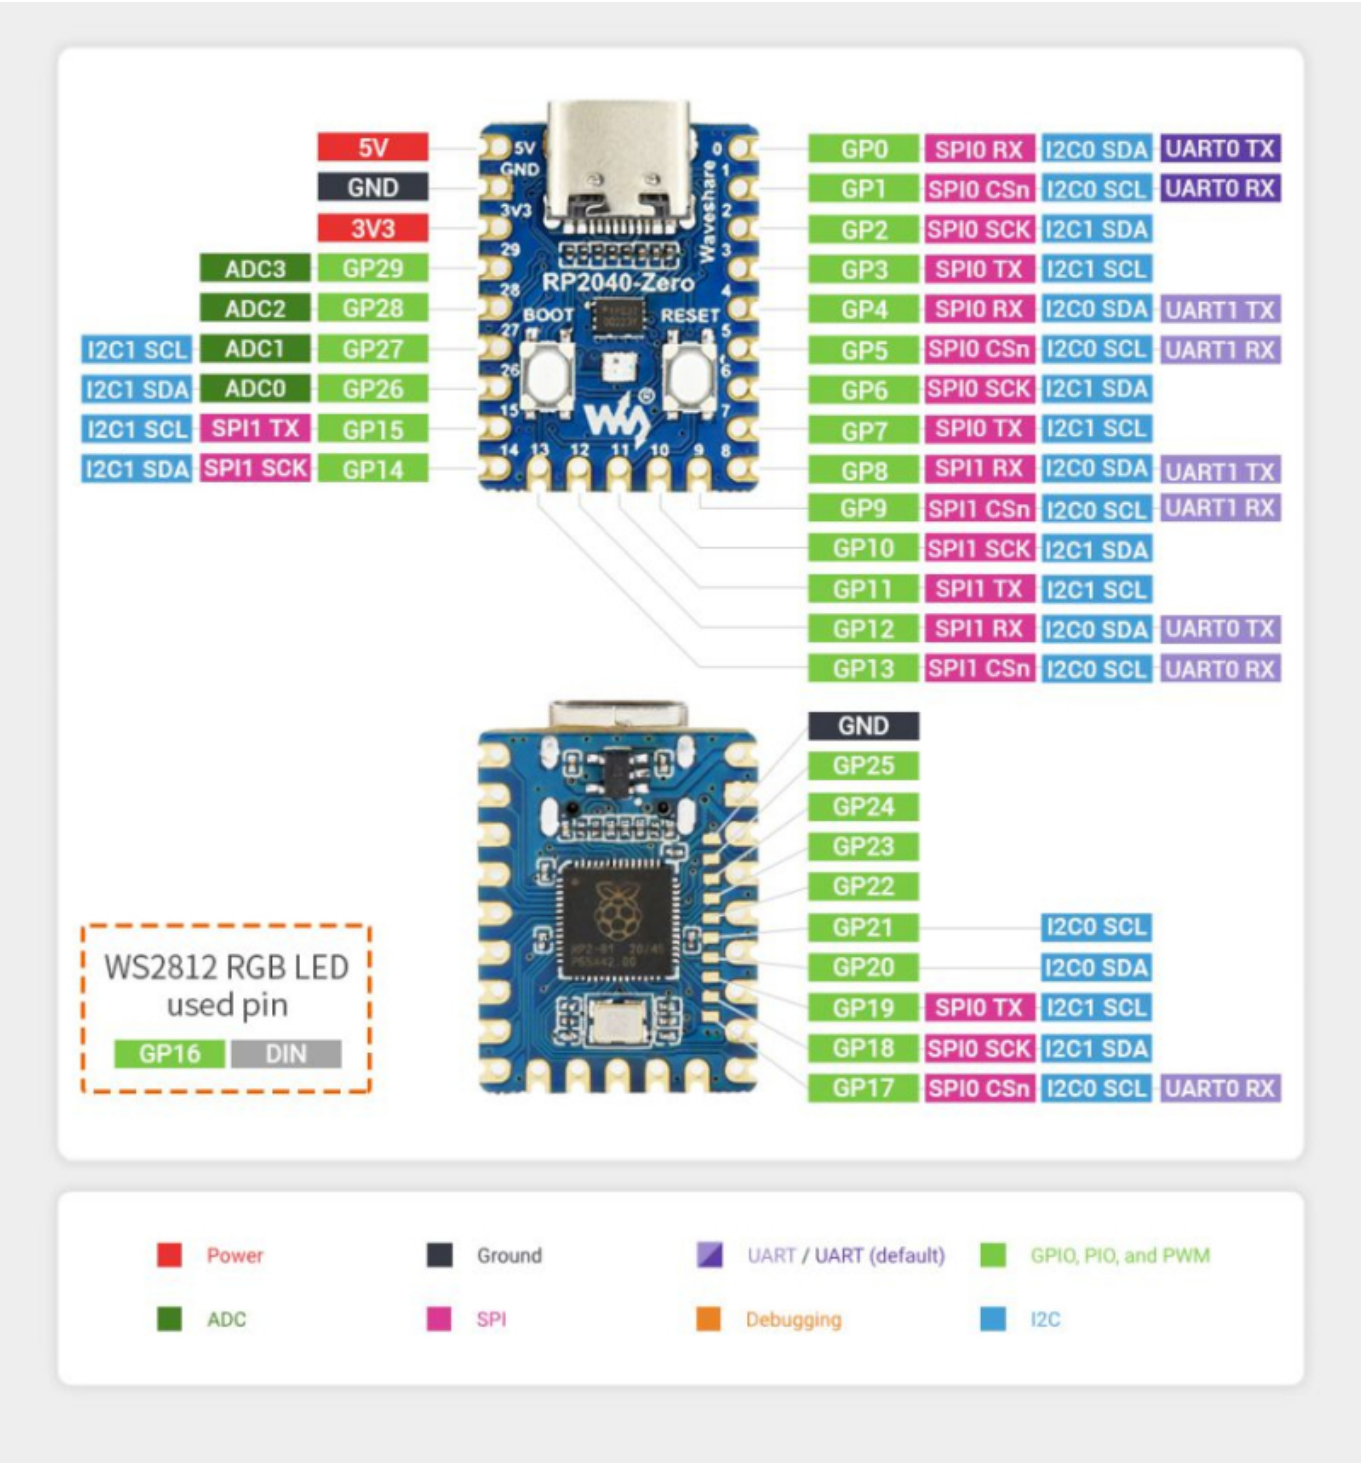

More Information

Checkout the Waveshare RP2040 Zero Wiki [here](#).

From:
<https://wiki.alanwalker.uk/> - WalkerWiki - wiki.alanwalker.uk

Permanent link:
https://wiki.alanwalker.uk/doku.php?id=rp2040_zero&rev=1784465413

Last update: 2026/07/19 12:50