


The Python Code

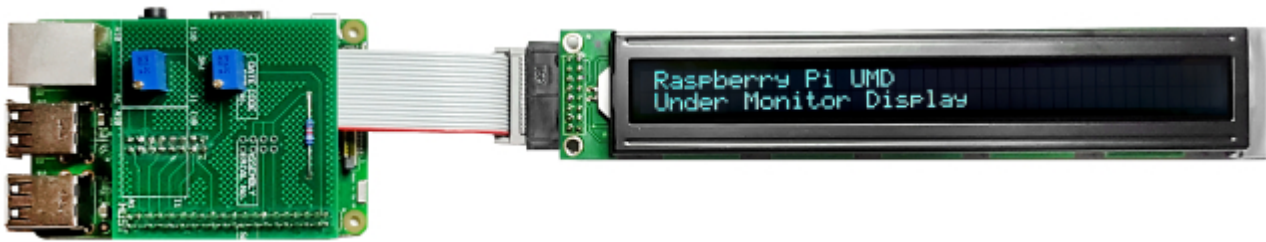

The Code Running the LCD

By now you should have your Raspberry Pi and LCD running. Here we will discuss the Python code that runs the LCD display and how it works (at a top level).

The Code

On each Raspberry Pi there is a file called `UMDisplay0x.py`. This is the file that sends data to the LCD, it is the same on each Pi except for a setting that tells the Pi which 2 of the 8 text lines to use.

(This is from the Master Pi)

The File Header

This is to identify to the Linux system what this file type is, and to allow the author to add some information (anything following a hash # is just a comment)

```
#!/usr/bin/python
#-----
# 16x2 LCD Test Script
#
# Author : Alan Walker
# Date   : 16/05/2016
#-----
```

A reminder of the pin outs

The following section is just comments, but it is a nice reminder of which GPIO pins on the Raspberry Pi that this Python code is going to try to address.

```
# The wiring for the LCD is as follows:
# 1 : GND
# 2 : 5V
# 3 : Contrast (0-5V)*          - Sets the LCD Contrast
# 4 : RS (Register Select)      - GPIO pin 26 - Physical pin 37
# 5 : R/W (Read Write)          - GROUND THIS PIN
# 6 : Enable or Strobe          - GPIO pin 19 - Physical pin 35
# 7 : Data Bit 0                - NOT USED
# 8 : Data Bit 1                - NOT USED
# 9 : Data Bit 2                - NOT USED
# 10: Data Bit 3                - NOT USED
# 11: Data Bit 4                - GPIO pin 13 - Physical pin 33
# 12: Data Bit 5                - GPIO pin 06 - Physical pin 31
# 13: Data Bit 6                - GPIO pin 05 - Physical pin 29
# 14: Data Bit 7                - GPIO pin 11 - Physical pin 23
```

# 15: LCD Backlight	-	+5V**
# 16: LCD Backlight	-	GND

Import Python Libraries

Python uses standard libraries to provide standard functions, so you don't have to code everyday tasks such as printing etc. Here we are importing some standard libraries for our project.

```
#import
import RPi.GPIO as GPIO
import time
import socket
import fcntl
import struct
```

Import Python Libraries

Rather than referring to GPIO pin numbers in the code, we are declaring some variables that we can use to reference the GPIO pin numbers to actual functions. (So the LCD Reset that uses GPIO pin 26 can be called by using just LCD_RS for example)

```
# Define GPIO to LCD mapping
LCD_RS = 26
LCD_E  = 19
LCD_D4 = 13
LCD_D5 = 6
LCD_D6 = 5
LCD_D7 = 11
```

Import Python Libraries

```
# Define some device constants LCD_WIDTH = 40 # Maximum characters per line LCD_CHR = True LCD_CMD = False
```

```
# Do I need to change line 2 address for 40 char display? LCD_LINE_1 = 0x80 # LCD RAM address for the 1st line LCD_LINE_2 = 0xC0 # LCD RAM address for the 2nd line
```

```
# Timing constants E_PULSE = 0.0005 E_DELAY = 0.0005
```

```
def main():
```

```
# Main program block
```

```
GPIO.setwarnings(False)
GPIO.setmode(GPIO.BCM)      # Use BCM GPIO numbers
GPIO.setup(LCD_E, GPIO.OUT)  # E
GPIO.setup(LCD_RS, GPIO.OUT) # RS
GPIO.setup(LCD_D4, GPIO.OUT) # DB4
GPIO.setup(LCD_D5, GPIO.OUT) # DB5
GPIO.setup(LCD_D6, GPIO.OUT) # DB6
GPIO.setup(LCD_D7, GPIO.OUT) # DB7
```

```
##### # PROGRAM START #
#####
```

```
# Initialise display
lcd_init()
```

```
lcd_string(" Waiting 5 Seconds for Network Start",LCD_LINE_1) # wait 5 seconds for DHCP process to
```

```
finish
time.sleep(5)
```

```
while True:
    ## Open the file with read only permit
    f = open('/home/pi/Python/my_data.txt', "r")

    ## use readlines to read all the lines in the file
    ## The variable "lines" is a list containing all lines
    # readline 400 is read in 400 chars
    # replace removed the carriage return and new line
    # [:40] truncates to 40 chars
```

```
line1 = f.readline(400).replace("\r\n", "")[:40]
line2 = f.readline(400).replace("\r\n", "")[:40]
line3 = f.readline(400).replace("\r\n", "")[:40]
line4 = f.readline(400).replace("\r\n", "")[:40]
line5 = f.readline(400).replace("\r\n", "")[:40]
line6 = f.readline(400).replace("\r\n", "")[:40]
line7 = f.readline(400).replace("\r\n", "")[:40]
line8 = f.readline(400).replace("\r\n", "")[:40]
```

```
## close the file after reading the lines.
f.close()
```

```
# Display the current IP Address information # lcd_string(" lo" + " " + get_ip_address('lo'),LCD_LINE_1) # lcd_string(" UMD 04",LCD_LINE_1)
# lcd_string(" eth0" + " " + get_ip_address('eth0'),LCD_LINE_2)
```

```
# time.sleep(2) # x second delay
```

```
# write line 1 and 2 to the LCD (Line7 and Line8 because this is UMD4)
lcd_string(" " + line1,LCD_LINE_1)
lcd_string(" " + line2,LCD_LINE_2)
```

```
time.sleep(1) # x second delay
```

```
##### # CHANGE NO CODE BELOW THIS LINE #
#####
```

```
def get_ip_address(ifname):
```

```
    s = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)
    return socket.inet_ntoa(fcntl.ioctl(
        s.fileno(),
        0x8915, # SIOCGIFADDR
        struct.pack('256s', ifname[:15])
    )[20:24])
```

```
def lcd_init():
```

```
# Initialise display
lcd_byte(0x33,LCD_CMD) # 110011 Initialise
lcd_byte(0x32,LCD_CMD) # 110010 Initialise
lcd_byte(0x06,LCD_CMD) # 000110 Cursor move direction
lcd_byte(0x0C,LCD_CMD) # 001100 Display On,Cursor Off, Blink Off
lcd_byte(0x28,LCD_CMD) # 101000 Data length, number of lines, font size
lcd_byte(0x01,LCD_CMD) # 000001 Clear display
time.sleep(E_DELAY)
```

```
def lcd_byte(bits, mode):
```

```
# Send byte to data pins
# bits = data
# mode = True for character
#       False for command
```

```
GPIO.output(LCD_RS, mode) # RS
```

```
# High bits
```

```
GPIO.output(LCD_D4, False)
GPIO.output(LCD_D5, False)
GPIO.output(LCD_D6, False)
GPIO.output(LCD_D7, False)
if bits&0x10==0x10:
    GPIO.output(LCD_D4, True)
if bits&0x20==0x20:
    GPIO.output(LCD_D5, True)
if bits&0x40==0x40:
    GPIO.output(LCD_D6, True)
if bits&0x80==0x80:
    GPIO.output(LCD_D7, True)
```

```
# Toggle 'Enable' pin
lcd_toggle_enable()
```

```
# Low bits
GPIO.output(LCD_D4, False)
GPIO.output(LCD_D5, False)
GPIO.output(LCD_D6, False)
GPIO.output(LCD_D7, False)
if bits&0x01==0x01:
    GPIO.output(LCD_D4, True)
if bits&0x02==0x02:
    GPIO.output(LCD_D5, True)
if bits&0x04==0x04:
    GPIO.output(LCD_D6, True)
if bits&0x08==0x08:
    GPIO.output(LCD_D7, True)
```

```
# Toggle 'Enable' pin
lcd_toggle_enable()
```

```
def lcd_toggle_enable():
```

```
# Toggle enable
time.sleep(E_DELAY)
GPIO.output(LCD_E, True)
time.sleep(E_PULSE)
GPIO.output(LCD_E, False)
time.sleep(E_DELAY)
```

```
def lcd_string(message,line):
```

```
# Send string to display
```

```
message = message.ljust(LCD_WIDTH," ")
```

```
lcd_byte(line, LCD_CMD)
```

```
for i in range(LCD_WIDTH):
    lcd_byte(ord(message[i]),LCD_CHR)
```

```
if name == 'main':
```

```
try:
    main()
except KeyboardInterrupt:
    pass
finally:
    #lcd_byte(0x01, LCD_CMD)
    #lcd_string("Goodbye!",LCD_LINE_1)
    GPIO.cleanup()
```

```
</file>
```

```
#!/usr/bin/python
#-----
# 16x2 LCD Test Script
#
# Author : Alan Walker
# Date   : 16/05/2016
#-----

# The wiring for the LCD is as follows:
# 1 : GND
# 2 : 5V
# 3 : Contrast (0-5V)*      - Sets the LCD Contrast
# 4 : RS (Register Select)  - GPIO pin 26 - Physical pin 37
# 5 : R/W (Read Write)     - GROUND THIS PIN
# 6 : Enable or Strobe      - GPIO pin 19 - Physical pin 35
# 7 : Data Bit 0            - NOT USED
# 8 : Data Bit 1            - NOT USED
# 9 : Data Bit 2            - NOT USED
# 10: Data Bit 3            - NOT USED
# 11: Data Bit 4            - GPIO pin 13 - Physical pin 33
# 12: Data Bit 5            - GPIO pin 06 - Physical pin 31
# 13: Data Bit 6            - GPIO pin 05 - Physical pin 29
# 14: Data Bit 7            - GPIO pin 11 - Physical pin 23
# 15: LCD Backlight        - +5V**
# 16: LCD Backlight        - GND

#import
import RPi.GPIO as GPIO
import time
import socket
import fcntl
import struct

# Define GPIO to LCD mapping
LCD_RS = 26
LCD_E  = 19
LCD_D4 = 13
LCD_D5 = 6
LCD_D6 = 5
LCD_D7 = 11

# Define some device constants
LCD_WIDTH = 40      # Maximum characters per line
LCD_CHR = True
LCD_CMD = False

# Do I need to change line 2 address for 40 char display?
LCD_LINE_1 = 0x80 # LCD RAM address for the 1st line
LCD_LINE_2 = 0xC0 # LCD RAM address for the 2nd line

# Timing constants
E_PULSE = 0.0005
E_DELAY = 0.0005

def main():
    # Main program block

    GPIO.setwarnings(False)
    GPIO.setmode(GPIO.BCM)      # Use BCM GPIO numbers
    GPIO.setup(LCD_E, GPIO.OUT) # E
    GPIO.setup(LCD_RS, GPIO.OUT) # RS
    GPIO.setup(LCD_D4, GPIO.OUT) # DB4
    GPIO.setup(LCD_D5, GPIO.OUT) # DB5
    GPIO.setup(LCD_D6, GPIO.OUT) # DB6
    GPIO.setup(LCD_D7, GPIO.OUT) # DB7

#####
#           PROGRAM START           #
#####
```

```
# Initialise display
lcd_init()

lcd_string(" Waiting 5 Seconds for Network Start",LCD_LINE_1) # wait 5 seconds for DHCP process to
finish
time.sleep(5)

while True:
    ## Open the file with read only permit
    f = open('/home/pi/Python/my_data.txt', "r")

    ## use readlines to read all the lines in the file
    ## The variable "lines" is a list containing all lines
    # readline 400 is read in 400 chars
    # replace removed the carriage return and new line
    # [:40] truncates to 40 chars

    line1 = f.readline(400).replace("\r\n","")[:40]
    line2 = f.readline(400).replace("\r\n","")[:40]
    line3 = f.readline(400).replace("\r\n","")[:40]
    line4 = f.readline(400).replace("\r\n","")[:40]
    line5 = f.readline(400).replace("\r\n","")[:40]
    line6 = f.readline(400).replace("\r\n","")[:40]
    line7 = f.readline(400).replace("\r\n","")[:40]
    line8 = f.readline(400).replace("\r\n","")[:40]

    ## close the file after reading the lines.
    f.close()

# Display the current IP Address information
# lcd_string(" lo" + " " + get_ip_address('lo'),LCD_LINE_1)
# lcd_string(" UMD 04",LCD_LINE_1)
# lcd_string(" eth0" + " " + get_ip_address('eth0'),LCD_LINE_2)

# time.sleep(2) # x second delay

# write line 1 and 2 to the LCD (Line7 and Line8 because this is UMD4)
lcd_string(" " + line1,LCD_LINE_1)
lcd_string(" " + line2,LCD_LINE_2)

time.sleep(1) # x second delay

#####
# CHANGE NO CODE BELOW THIS LINE #
#####

def get_ip_address(ifname):
    s = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)
    return socket.inet_ntoa(fcntl.ioctl(
        s.fileno(),
        0x8915, # SIOCGIFADDR
        struct.pack('256s', ifname[:15])
    )[20:24])

def lcd_init():
    # Initialise display
    lcd_byte(0x33,LCD_CMD) # 110011 Initialise
    lcd_byte(0x32,LCD_CMD) # 110010 Initialise
    lcd_byte(0x06,LCD_CMD) # 000110 Cursor move direction
    lcd_byte(0x0C,LCD_CMD) # 001100 Display On,Cursor Off, Blink Off
    lcd_byte(0x28,LCD_CMD) # 101000 Data length, number of lines, font size
    lcd_byte(0x01,LCD_CMD) # 000001 Clear display
    time.sleep(E_DELAY)

def lcd_byte(bits, mode):
    # Send byte to data pins
```

```
# bits = data
# mode = True for character
#       False for command

GPIO.output(LCD_RS, mode) # RS

# High bits
GPIO.output(LCD_D4, False)
GPIO.output(LCD_D5, False)
GPIO.output(LCD_D6, False)
GPIO.output(LCD_D7, False)
if bits&0x10==0x10:
    GPIO.output(LCD_D4, True)
if bits&0x20==0x20:
    GPIO.output(LCD_D5, True)
if bits&0x40==0x40:
    GPIO.output(LCD_D6, True)
if bits&0x80==0x80:
    GPIO.output(LCD_D7, True)

# Toggle 'Enable' pin
lcd_toggle_enable()

# Low bits
GPIO.output(LCD_D4, False)
GPIO.output(LCD_D5, False)
GPIO.output(LCD_D6, False)
GPIO.output(LCD_D7, False)
if bits&0x01==0x01:
    GPIO.output(LCD_D4, True)
if bits&0x02==0x02:
    GPIO.output(LCD_D5, True)
if bits&0x04==0x04:
    GPIO.output(LCD_D6, True)
if bits&0x08==0x08:
    GPIO.output(LCD_D7, True)

# Toggle 'Enable' pin
lcd_toggle_enable()

def lcd_toggle_enable():
    # Toggle enable
    time.sleep(E_DELAY)
    GPIO.output(LCD_E, True)
    time.sleep(E_PULSE)
    GPIO.output(LCD_E, False)
    time.sleep(E_DELAY)

def lcd_string(message,line):
    # Send string to display

    message = message.ljust(LCD_WIDTH," ")

    lcd_byte(line, LCD_CMD)

    for i in range(LCD_WIDTH):
        lcd_byte(ord(message[i]),LCD_CHR)

if __name__ == '__main__':

    try:
        main()
    except KeyboardInterrupt:
        pass
    finally:
        #lcd_byte(0x01, LCD_CMD)
        #lcd_string("Goodbye!",LCD_LINE_1)
        GPIO.cleanup()
```

From:

<https://wiki.alanwalker.uk/> - WalkerWiki - wiki.alanwalker.uk

Permanent link:

https://wiki.alanwalker.uk/doku.php?id=the_python_code&rev=1482336027

Last update: **2023/03/09 22:35**

