


# Create VMWare VM

Jul 2017

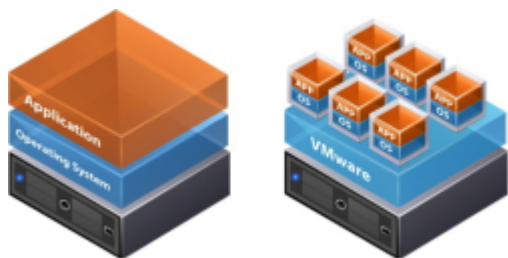


## Some things to remember before you start

1. You must create your vSwitch and Port Groups first, or you won't be able to select them here (you can do it later).

2. Create ISO folder on datastore and upload ISO first, you can do this later, but you must do it before you start the VM. If you are not sure what point 1 and point 2 mean, please go back to the relevant sections on this wiki to find out, it's important.

## Start VM Creation


After logging in to ESXi Web Admin, click Virtual Machines on the left.

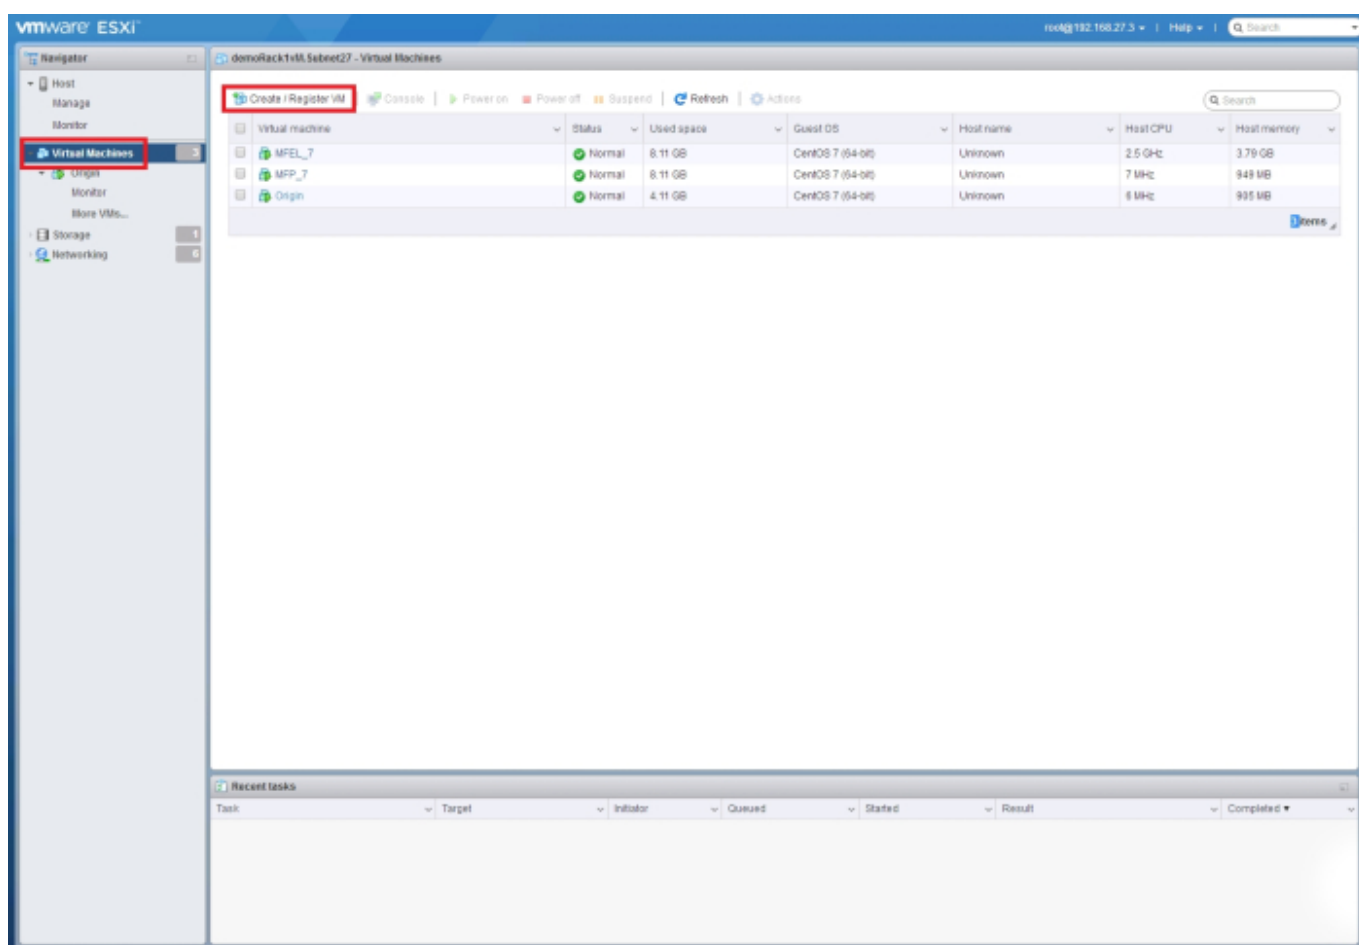

Click [Create / Register VM](#).

## Select creation type


The New Virtual Machine wizard will start

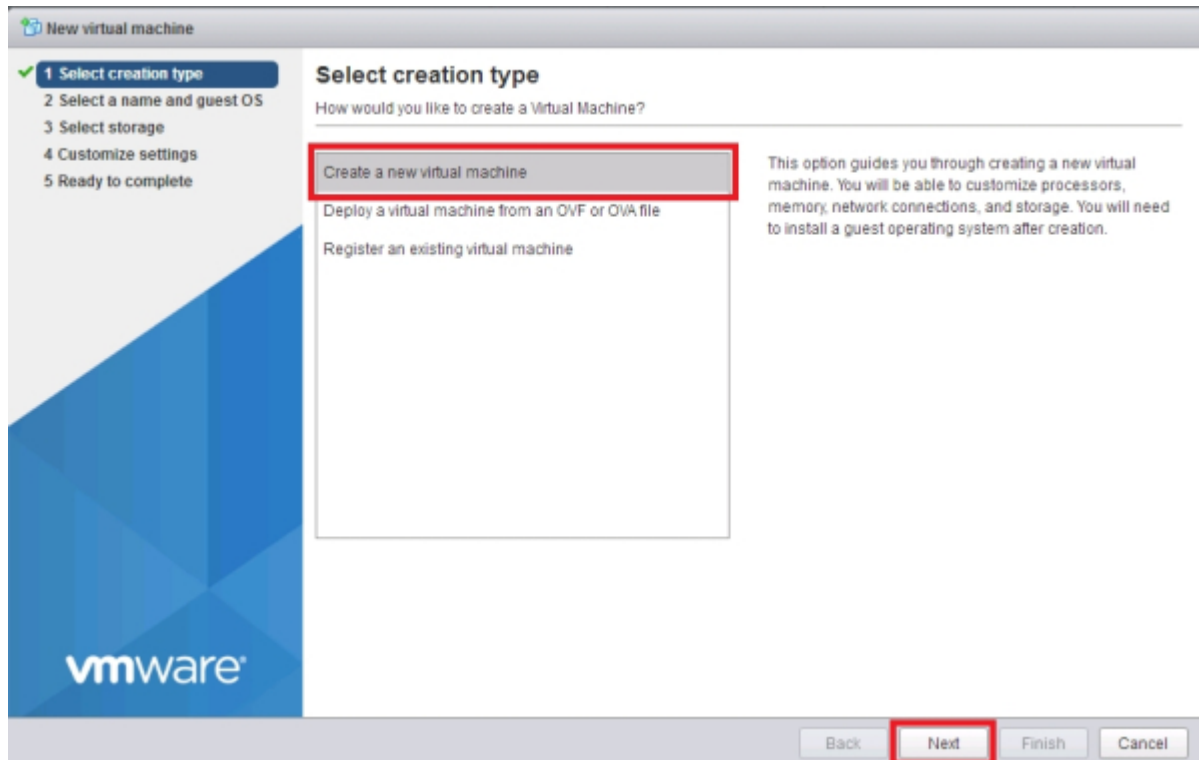

Select **Create a new virtual machine** and click **Next**.

## Select a name and guest OS

Here we must select a name for our VM, and what OS we will use.

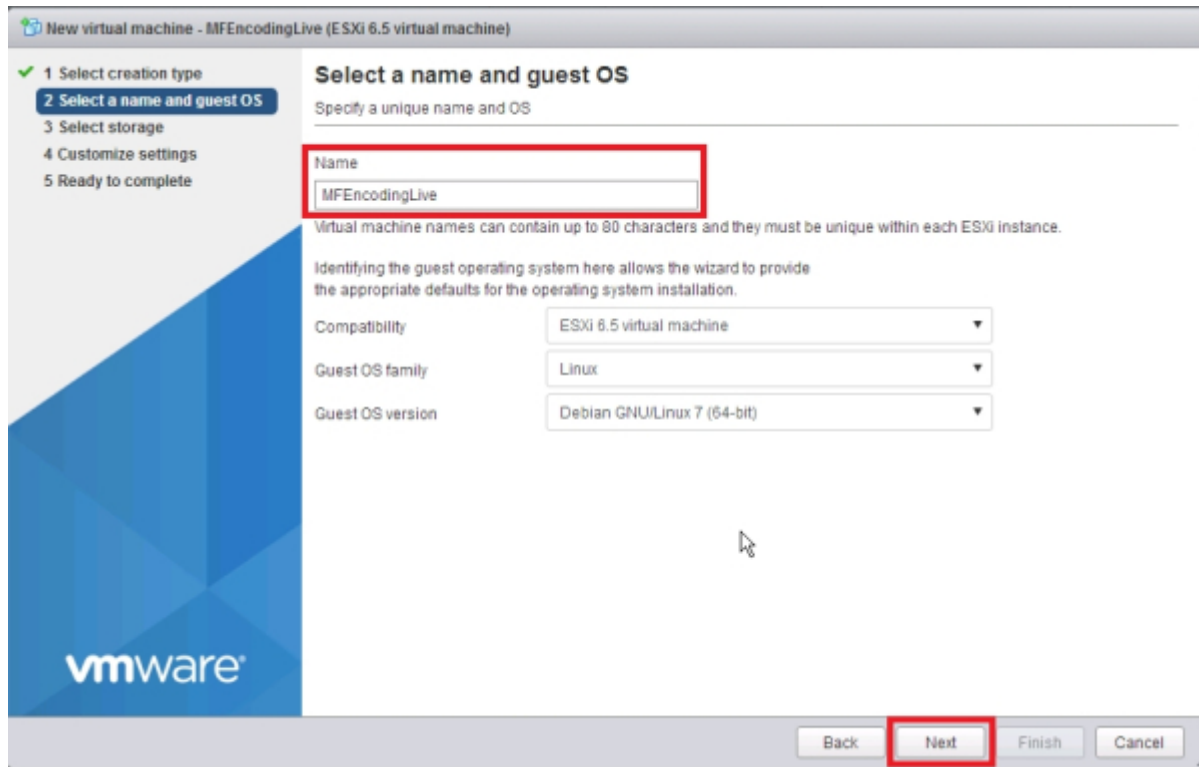

Enter the following:

**Name:** A name you will recognise the VM by.

**Compatibility:** ESXi 6.5 virtual machine (unless you are using an older or newer version).

**Guest OS family:** Linux (unless you need something else).


**Guest OS version:** (CentOS 7 (64bit)).

Click **Next**.

---

## Select Storage

This is where we select our datastore (you will probably only have one, especially on a smaller test system).

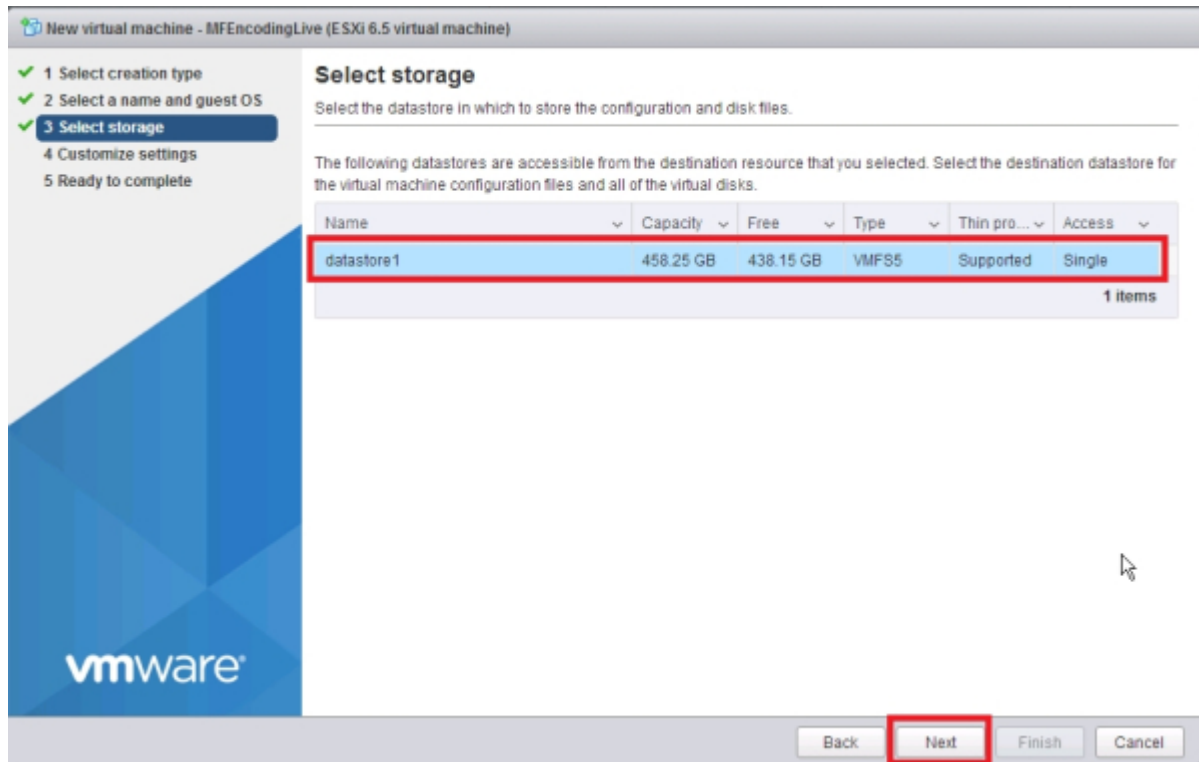


Select your datastore by clicking on it, then select **Next**.

---

## Customize Settings

This is where we set the parameters for our VM such as memory, hard disk space, interfaces etc.

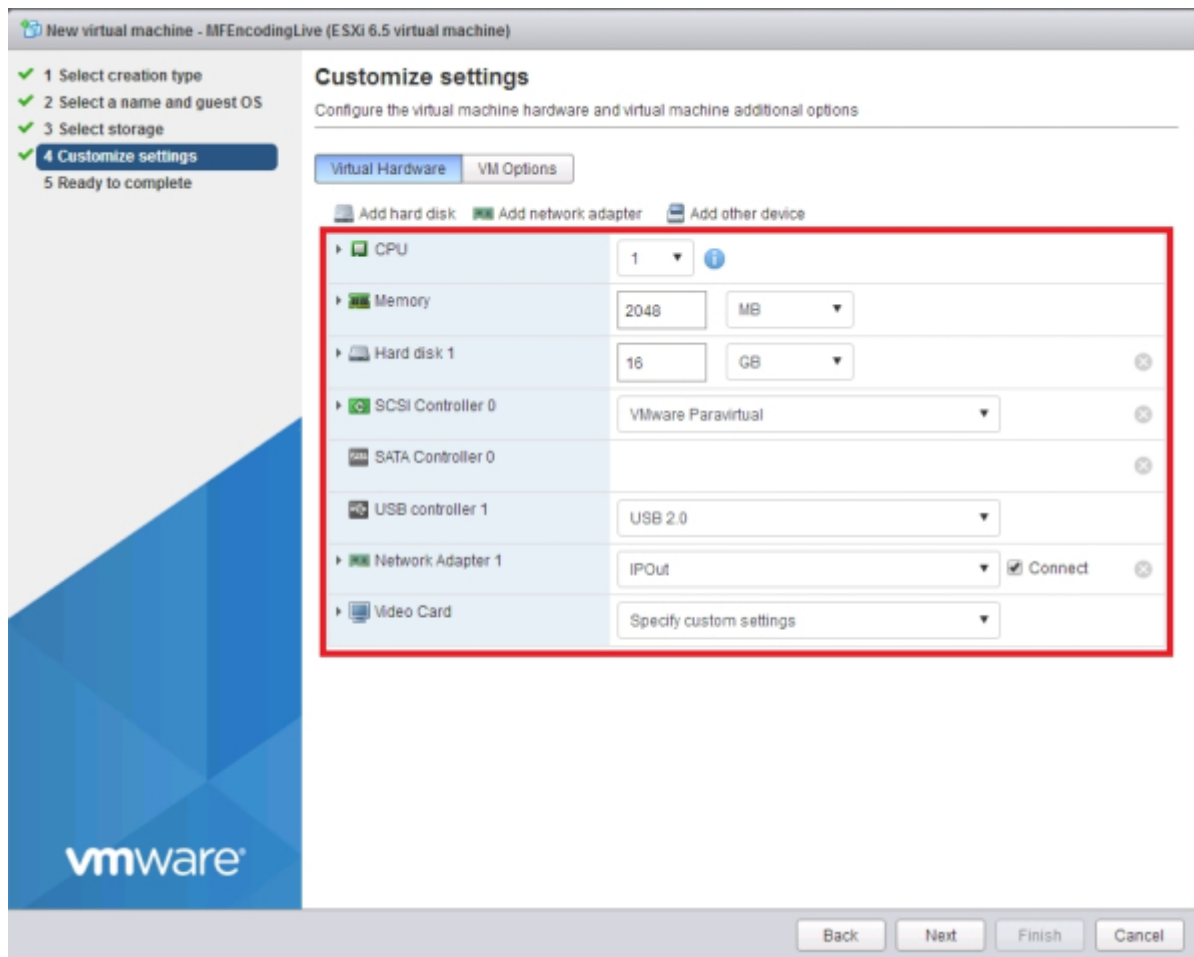


In the above example, we can see the default settings that are set when you first open this page, these are not suitable however, and we need to change most of them.

If you are setting up an MFEL, use these settings.

- CPU** - Set this to 8
- Memory** - Set this to 8192
- Hard Disk 1** - 16B (default)
- SCSI Controller 0** - VMware Paravirtual (default)
- Sata Controller 0** - Blank (default)
- USB Controller 1** - USB 2.0 (default)
- Network Adapter 1** - (the setting depends on what port groups you created)
- Video Card** - Specify Custom Settings (default)


Do **NOT** press Next yet.

Below is the settings we require.

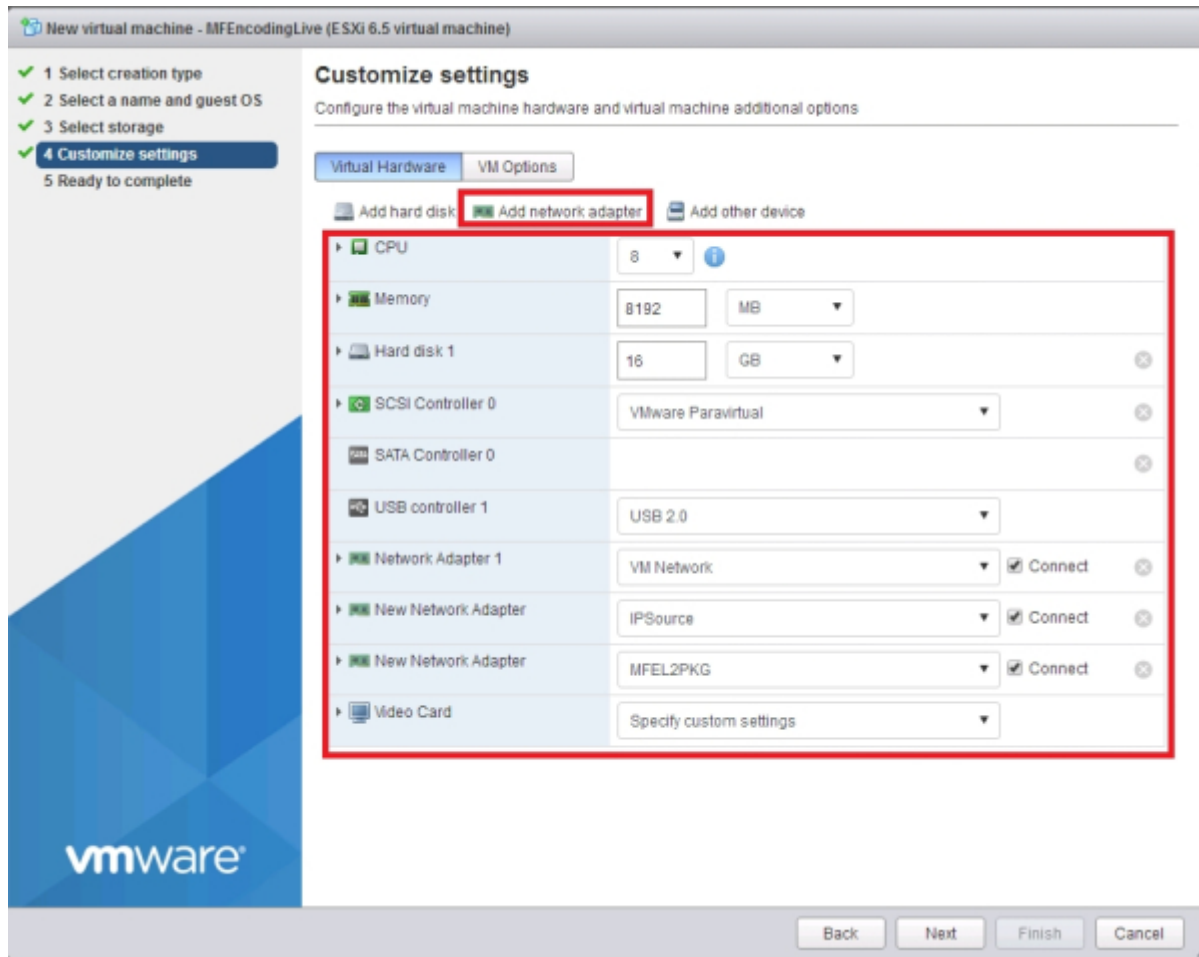


We also need to add a couple of Interfaces (depending on what you are doing). Click the [Add network adapter](#) link to keep adding adapters.

To enable us to boot up an OS, we will add a CD/DVD Drive (its a virtual one) and assign it an ISO image to boot from.

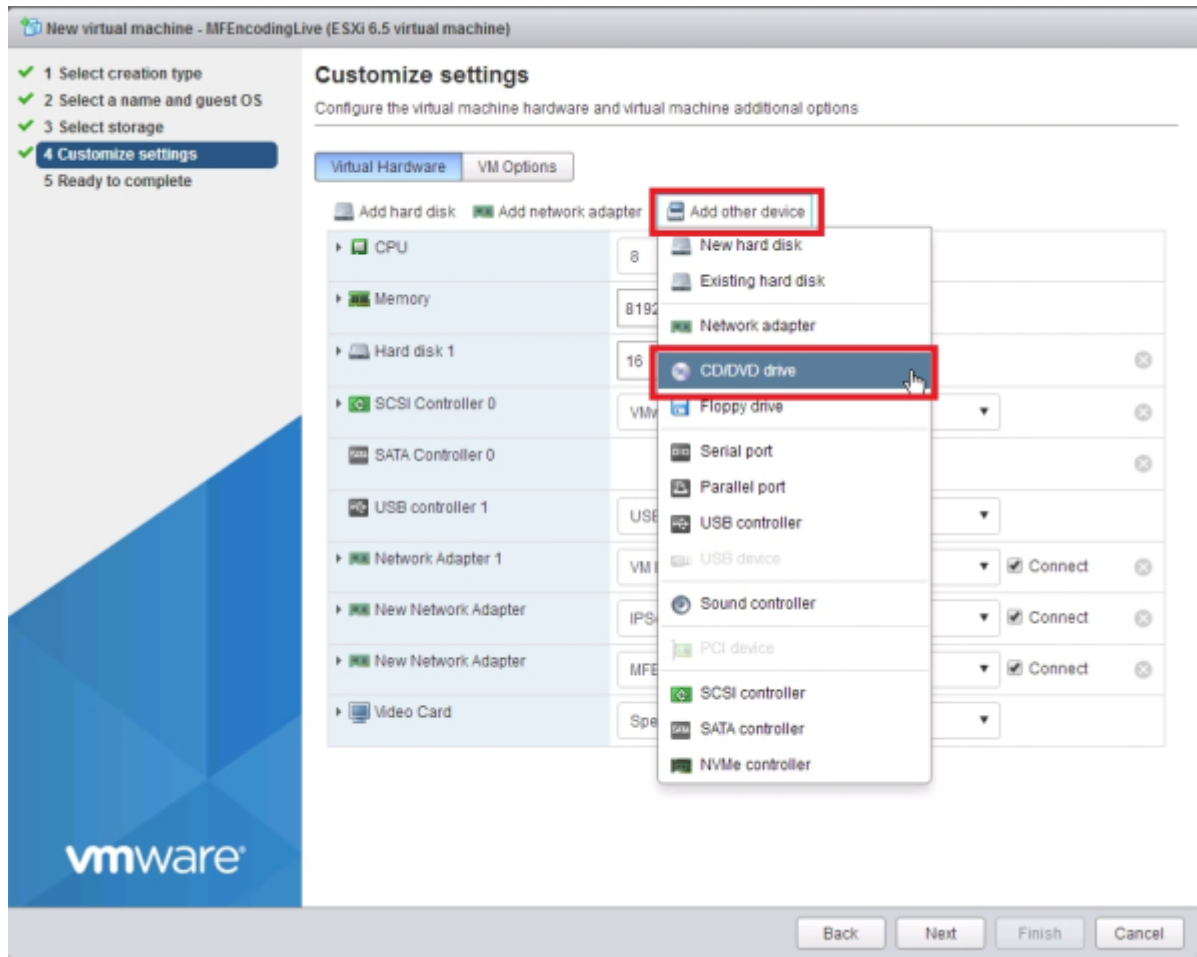


Click **Add Other Device** and then **CD/DVD Drive**.

When the CD/DVD device has been added, you will see it in the hardware list.

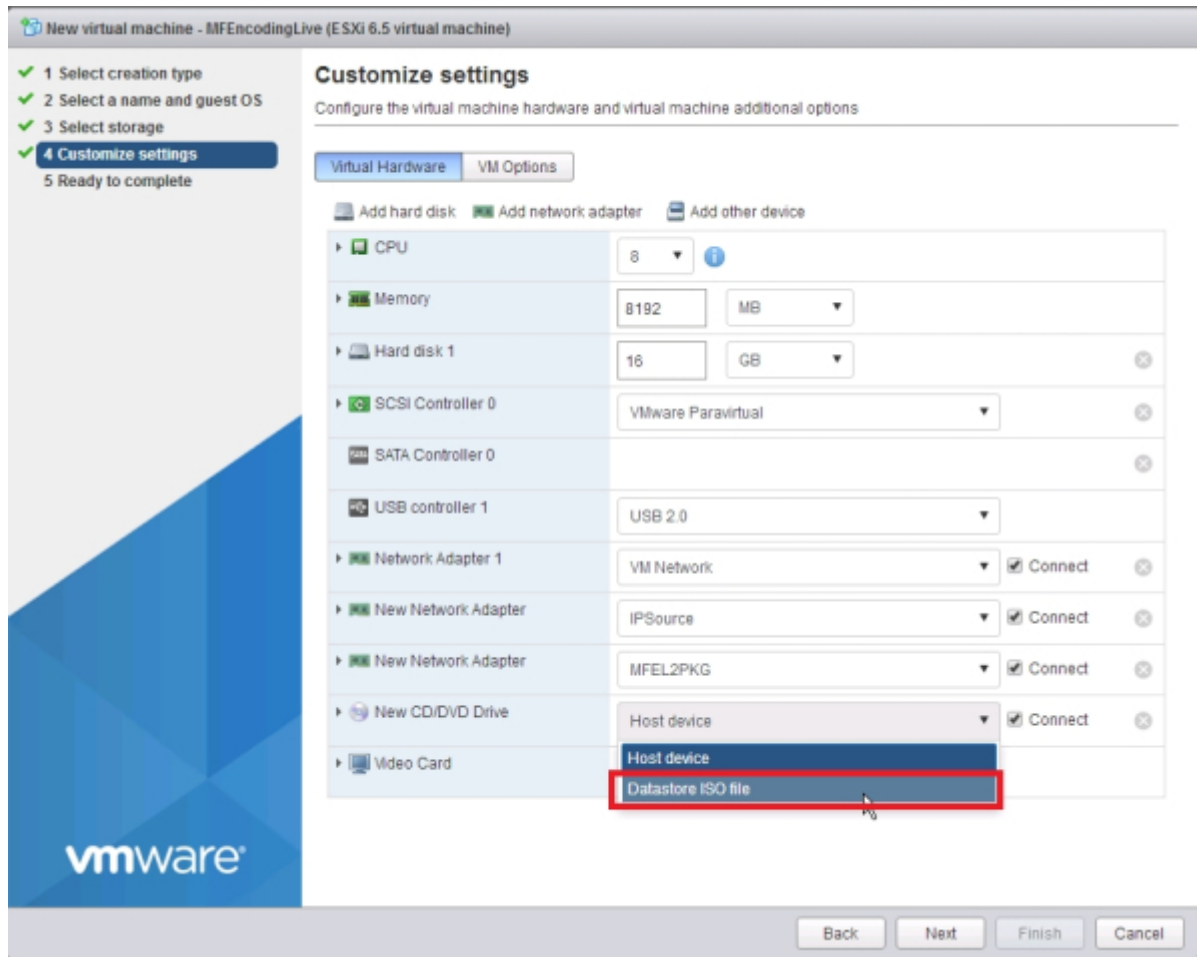

Click the device to see the options and select **Datastore ISO file**.

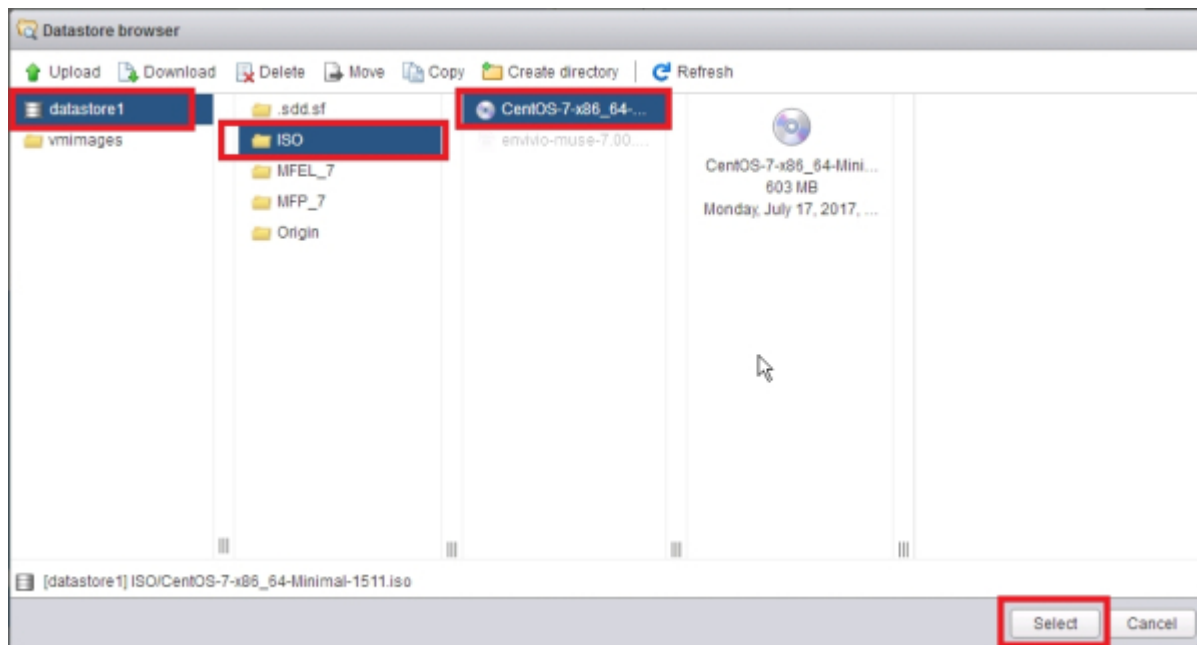

Select the datastore folder you created when installing VMware, and the ISO file. Click **Select**. You can do this later if required.

The screenshot shows the 'Customize settings' window in VMware Workstation. On the left, a progress bar indicates five steps: 1. Select creation type, 2. Select a name and guest OS, 3. Select storage, 4. Customize settings (current step), and 5. Ready to complete. The main area is titled 'Customize settings' and 'Configure the virtual machine hardware and virtual machine additional options'. It has two tabs: 'Virtual Hardware' and 'VM Options'. Below the tabs are three buttons: 'Add hard disk', 'Add network adapter', and 'Add other device'. A red rectangle highlights the hardware configuration list, which includes: CPU (8), Memory (8192 MB), Hard disk 1 (16 GB), SCSI Controller 0 (VMware Paravirtual), SATA Controller 0, USB controller 1 (USB 2.0), Network Adapter 1 (VM Network, Connect checked), New Network Adapter (IPSource, Connect checked), New Network Adapter (MFEL2PKG, Connect checked), New CD/DVD Drive (Datastore ISO file, Connect checked), and Video Card (Specify custom settings). At the bottom, there are four buttons: 'Back', 'Next' (highlighted with a red rectangle), 'Finish', and 'Cancel'.

| Device              | Configuration           | Connect                             |
|---------------------|-------------------------|-------------------------------------|
| CPU                 | 8                       |                                     |
| Memory              | 8192 MB                 |                                     |
| Hard disk 1         | 16 GB                   |                                     |
| SCSI Controller 0   | VMware Paravirtual      |                                     |
| SATA Controller 0   |                         |                                     |
| USB controller 1    | USB 2.0                 |                                     |
| Network Adapter 1   | VM Network              | <input checked="" type="checkbox"/> |
| New Network Adapter | IPSource                | <input checked="" type="checkbox"/> |
| New Network Adapter | MFEL2PKG                | <input checked="" type="checkbox"/> |
| New CD/DVD Drive    | Datastore ISO file      | <input checked="" type="checkbox"/> |
| Video Card          | Specify custom settings |                                     |

Ensure you settings match the page above.

If so click **Next**.

## Ready to complete

The Create VM Wizard displays a confirmation page of you selected settings.

New virtual machine - MFEncodingLive (ESXi 6.5 virtual machine)

1 Select creation type

2 Select a name and guest OS

3 Select storage

4 Customize settings

5 Ready to complete

Ready to complete

Review your settings selection before finishing the wizard

|                           |                                                   |
|---------------------------|---------------------------------------------------|
| Provisioning type         | new                                               |
| Name                      | MFEncodingLive                                    |
| Datastore                 | datastore1                                        |
| Guest OS name             | Debian GNU/Linux 7 (64-bit)                       |
| Compatibility             | ESXi 6.5 virtual machine                          |
| vCPUs                     | 8                                                 |
| Memory                    | 8192 MB                                           |
| Network adapters          | 3                                                 |
| Network adapter 1 network | VM Network                                        |
| Network adapter 1 type    | VMXNET 3                                          |
| Network adapter 2 network | IPSource                                          |
| Network adapter 2 type    | VMXNET 3                                          |
| Network adapter 3 network | MFEL2PKG                                          |
| Network adapter 3 type    | VMXNET 3                                          |
| IDE controller 0          | IDE 0                                             |
| IDE controller 1          | IDE 1                                             |
| SCSI controller 0         | VMware Paravirtual                                |
| SATA controller 0         | New SATA controller                               |
| Hard disk 1               |                                                   |
| Capacity                  | 16GB                                              |
| Datastore                 | [datastore1] MFEncodingLive                       |
| Mode                      | Dependent                                         |
| Provisioning              | Thin provisioned                                  |
| Controller                | SCSI controller 0 : 0                             |
| CD/DVD drive 1            |                                                   |
| Backing                   | [datastore1] ISO/CentOS-7-x86_64-Minimal-1511.iso |
| Connected                 | Yes                                               |

Back

Next


Finish

Cancel


If you are happy with your settings, click **Finish**.

Fix a little VMWare Bug

You will now be back at the VMWare Virtual Machines page.

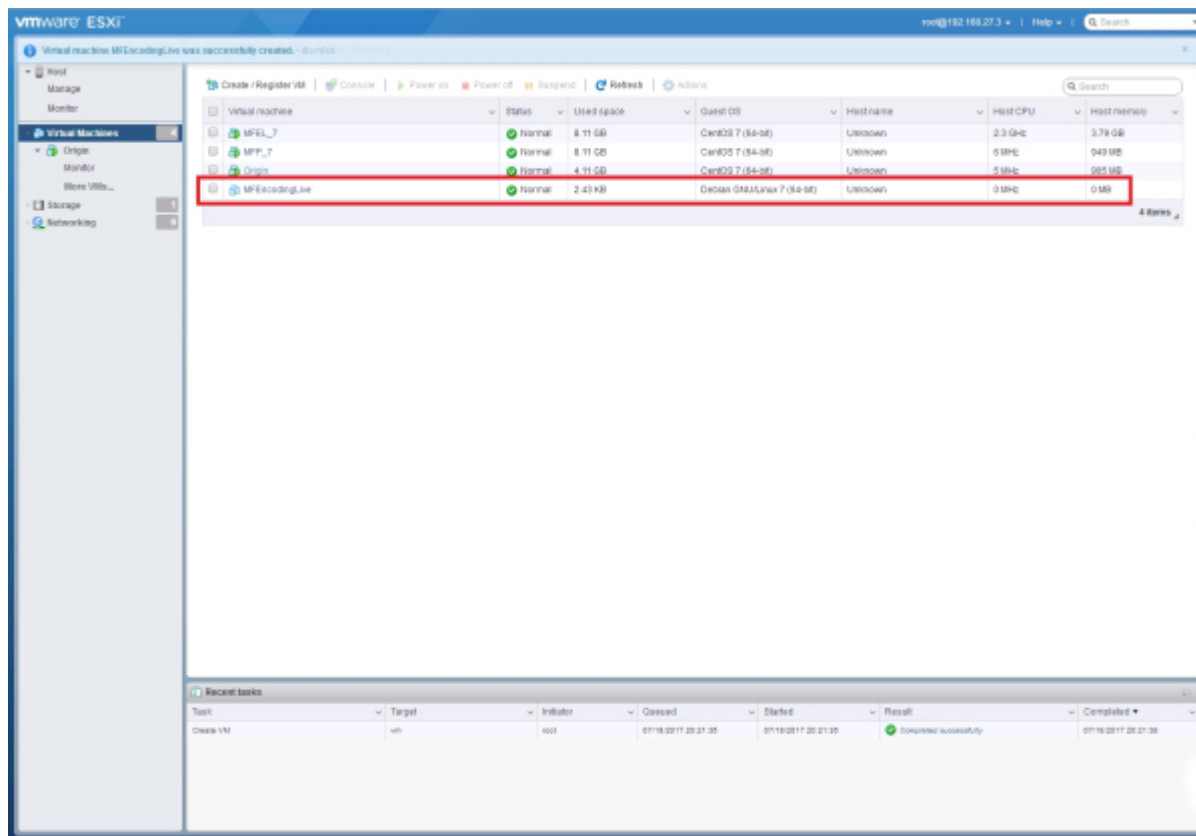


Click on your new VM name (MFEncodingLive in this example).

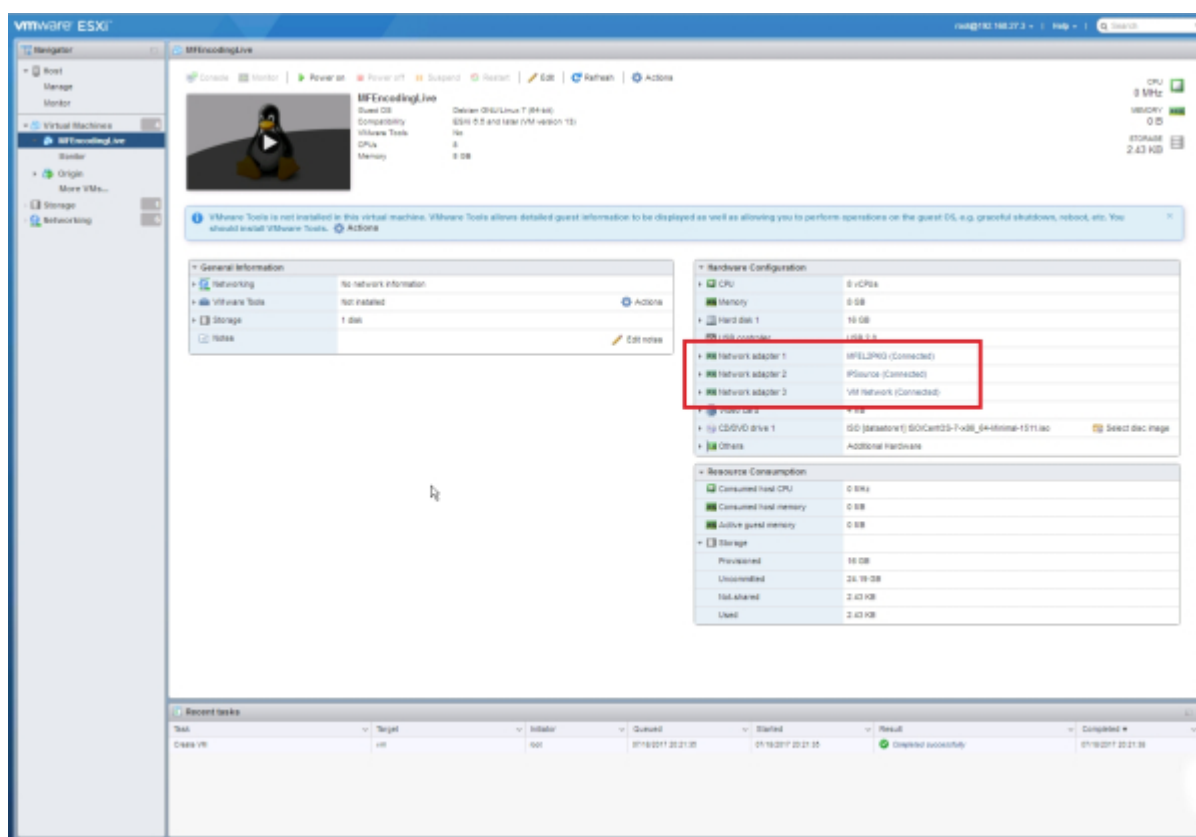

You will see the specifics of the VM listed, if you look at the **interfaces**, you will see the interfaces you added, but most likely the **Port Groups** will be wrong (it's happened to me every time so far).


Click Edit at the top of the page to go back to the editable VM settings page.

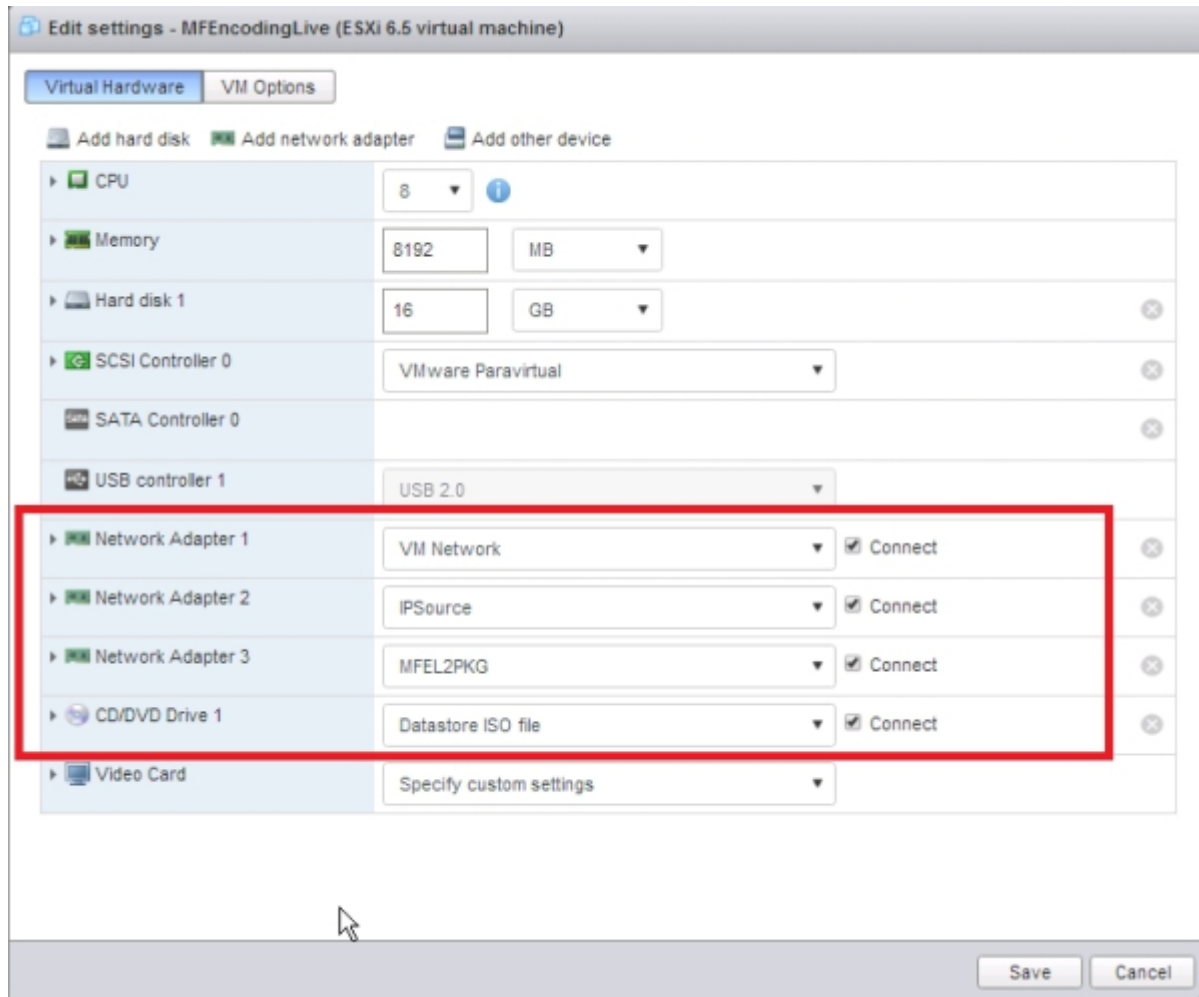

Set the correct **Port Names** to correspond with the appropriate **Interface**.

Click **Save**.

You will be returned to the main ESXi Virtual Machine page.

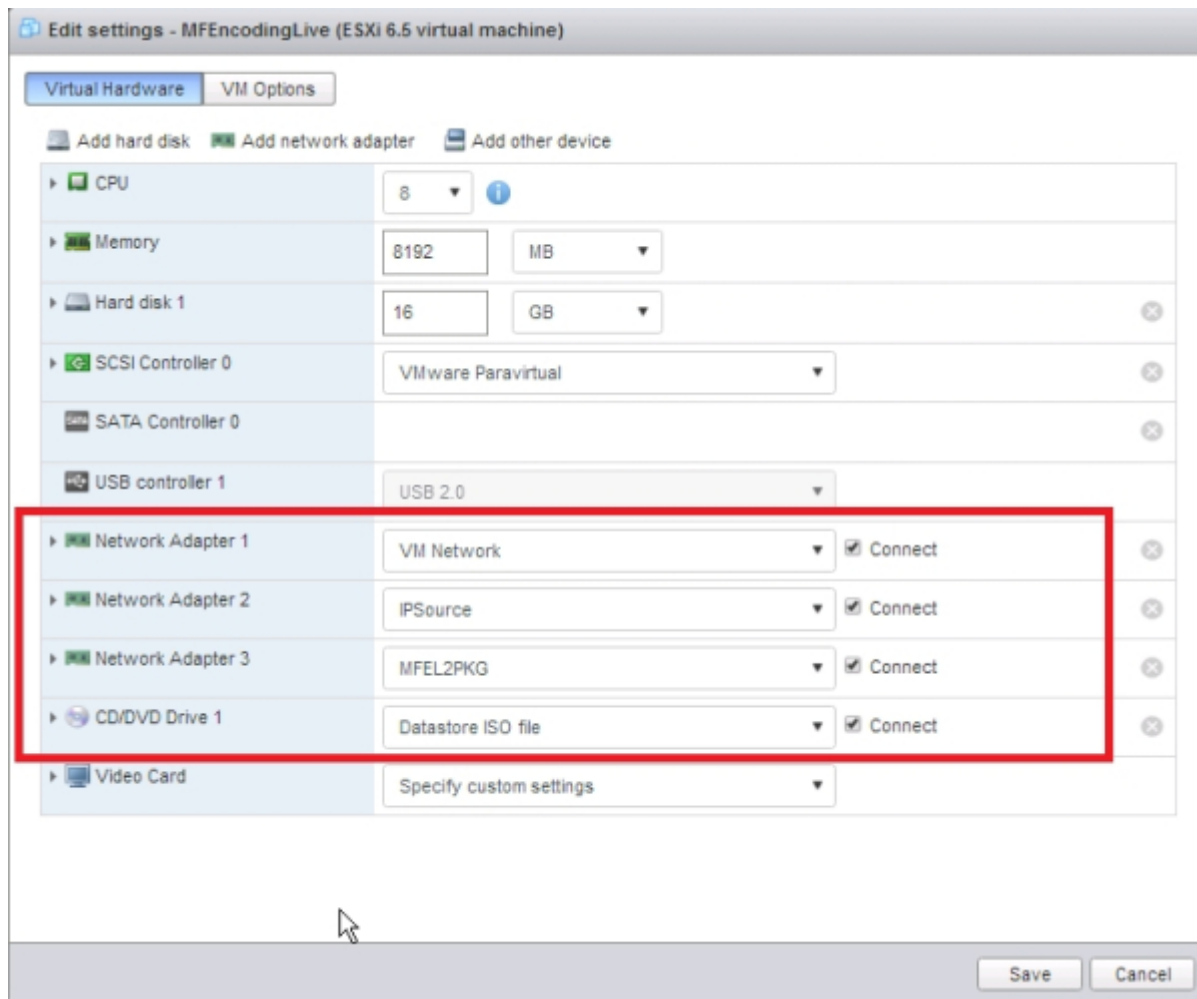

Check your VM Interface settings to confirm they are now correct.

From:  
<https://wiki.alanwalker.uk/> - **WalkerWiki** - [wiki.alanwalker.uk](https://wiki.alanwalker.uk/)

Permanent link:  
[https://wiki.alanwalker.uk/doku.php?id=create\\_vm&rev=1500877523](https://wiki.alanwalker.uk/doku.php?id=create_vm&rev=1500877523)

Last update: **2023/03/09 22:35**

