

# Interface Team or Bond with nmtui

Feb 2022

## Overview

Interface bonding/teaming can be setup by creating/editing existing ifcfg-xxx files (CentOS). However, this method requires a lot of experience, is error prone and can be quite a laborious process.

Using **nmtui** (Network Manager Text User Interface) this process can not only be greatly simplified, it can be really fast and much less error prone.

## nmtui


In the following example, there are three physical interfaces:

|        |         |                                             |
|--------|---------|---------------------------------------------|
| lo     | UNKNOWN | 127.0.0.1/8 ::1/128                         |
| eno1   | UP      | 10.43.30.10/24 fe80::aff9:21b2:3c9f:21ff/64 |
| enp2s0 | UP      |                                             |
| enp3s0 | DOWN    |                                             |

eno1 is set to dhcp, and I am using this connection to configure the team/bond. enp2s0 and enp3s0 are the two interfaces I wish to team.


To start nmtui from the command line use **sudo nmtui** if you are already sudo then the nmtui interface will appear, if you are not then you will have to enter your sudo password first.

The nmtui interface is a text based UI, so it runs very well from the command line (no Desktop GUI required). When nmtui first runs you will see this menu:

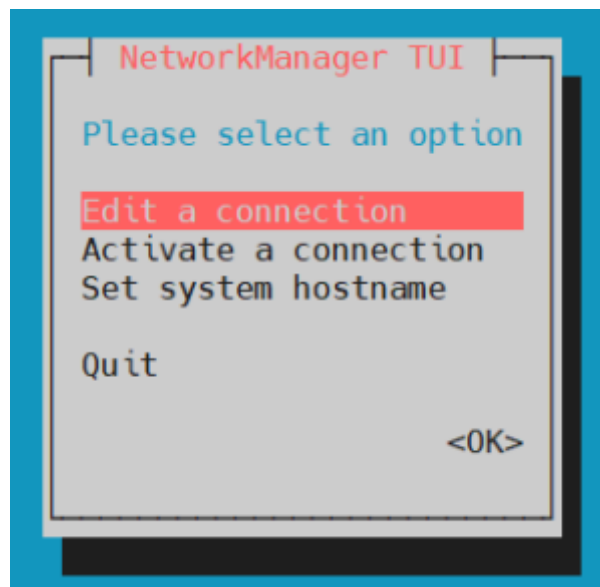

Select **Edit a connection**.

The next menu shows you a list of the current interfaces

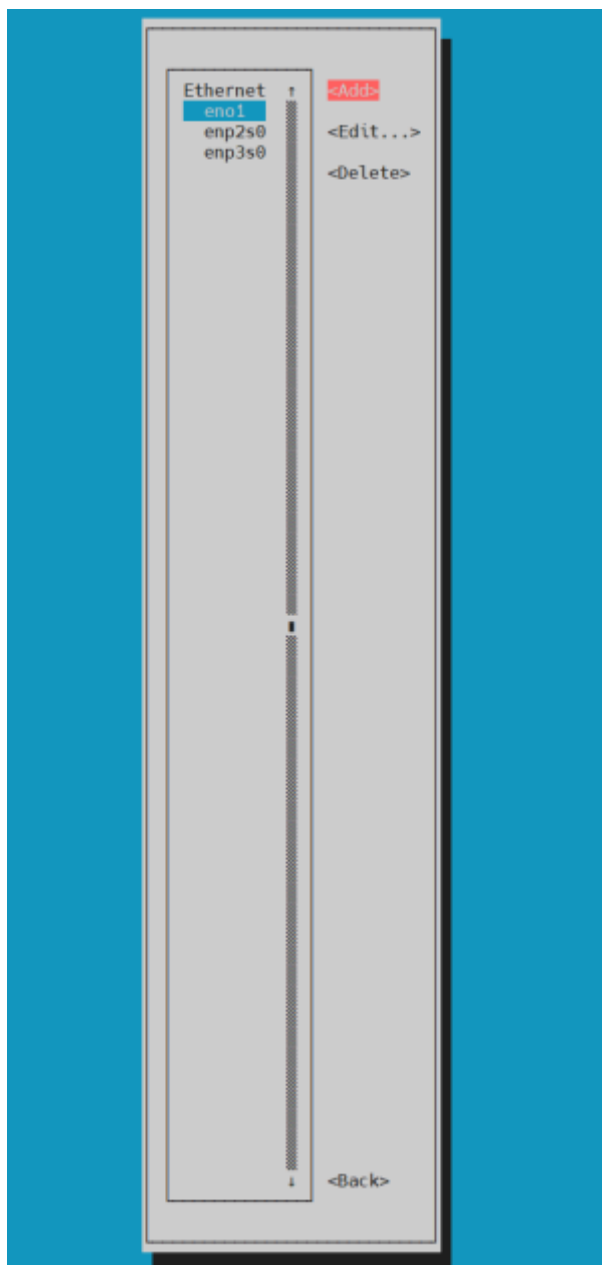

Using the cursor keys, move over the right and select **<Add>**

From:  
<https://wiki.alanwalker.uk/> - WalkerWiki - [wiki.alanwalker.uk](https://wiki.alanwalker.uk/)

Permanent link:  
[https://wiki.alanwalker.uk/doku.php?id=wiki:interface\\_team\\_or\\_bond\\_with\\_nmtui&rev=1645472979](https://wiki.alanwalker.uk/doku.php?id=wiki:interface_team_or_bond_with_nmtui&rev=1645472979)

Last update: **2023/03/09 22:35**

