

Interface Team or Bond with nmtui

Feb 2022

Overview

Interface bonding/teaming can be setup by creating/editing existing ifcfg-xxx files (CentOS). However, this method requires a lot of experience, is error prone and can be quite a laborious process.

Using **nmtui** (Network Manager Text User Interface) this process can not only be greatly simplified, it can be really fast and much less error prone.

nmtui


In the following example, there are three physical interfaces:

lo	UNKNOWN	127.0.0.1/8 ::1/128
eno1	UP	10.43.30.10/24 fe80::aff9:21b2:3c9f:21ff/64
enp2s0	UP	
enp3s0	DOWN	

eno1 is set to dhcp, and I am using this connection to configure the team/bond. enp2s0 and enp3s0 are the two interfaces I wish to team.


To start nmtui from the command line use **sudo nmtui** if you are already sudo then the nmtui interface will appear, if you are not then you will have to enter your sudo password first.

The nmtui interface is a text based UI, so it runs very well from the command line (no Desktop GUI required). When nmtui first runs you will see this menu:

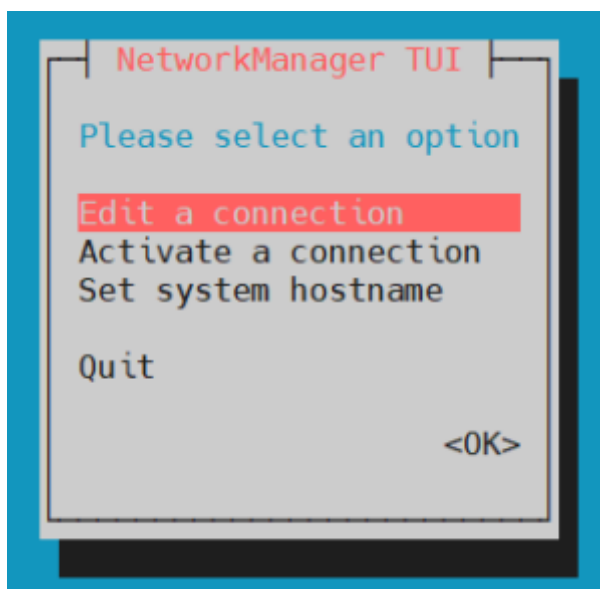


Select **Edit a connection**.

The next menu shows you a list of the current interfaces

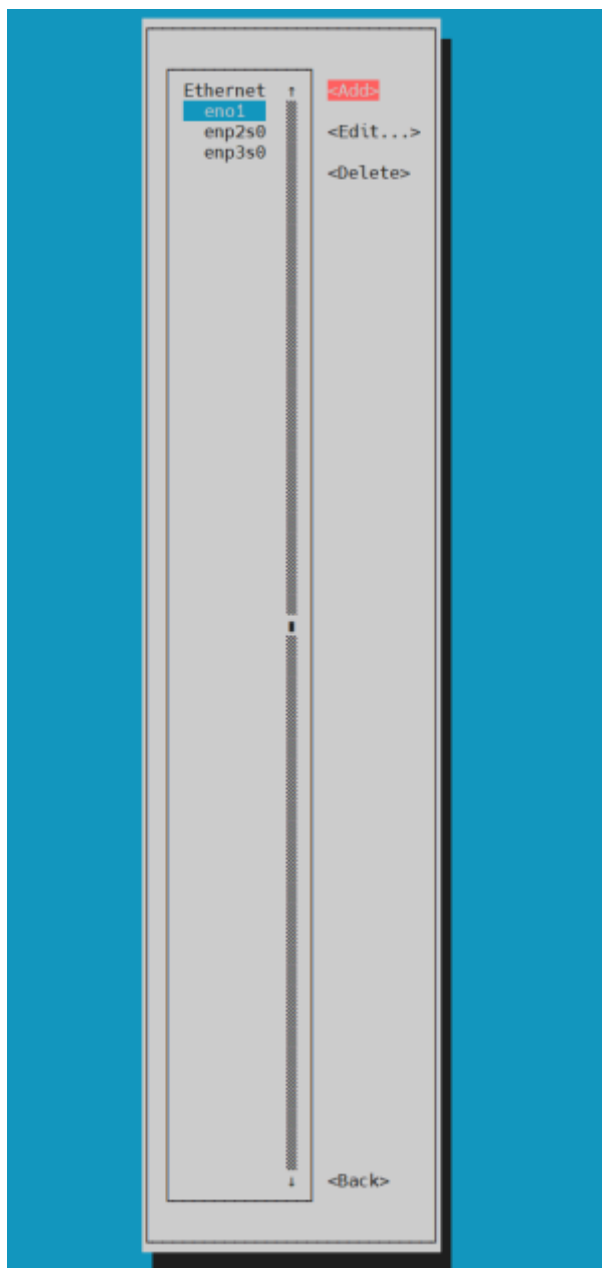


Using the cursor keys, move over the right and select **<Add>**

From the New Connection option menu

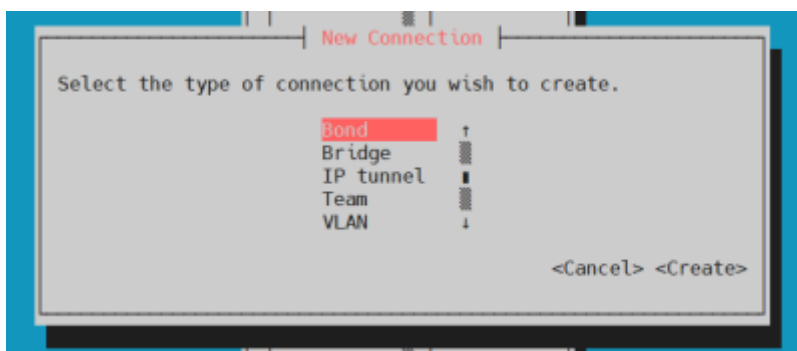


Select either **Bond** or **Team**.

Add a profile name to identify your bond/team

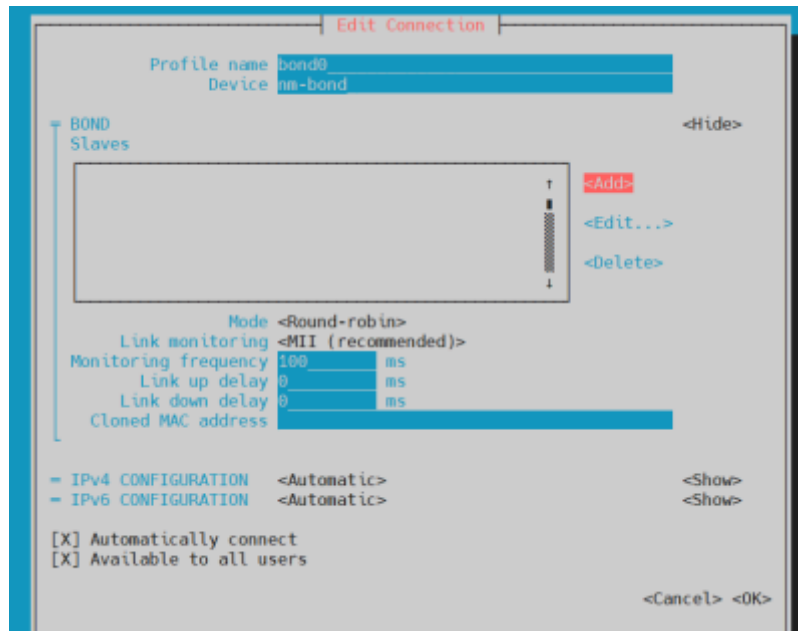


Here I have used **bond0**

Now click **<Add>** to the right of the Slaves box.

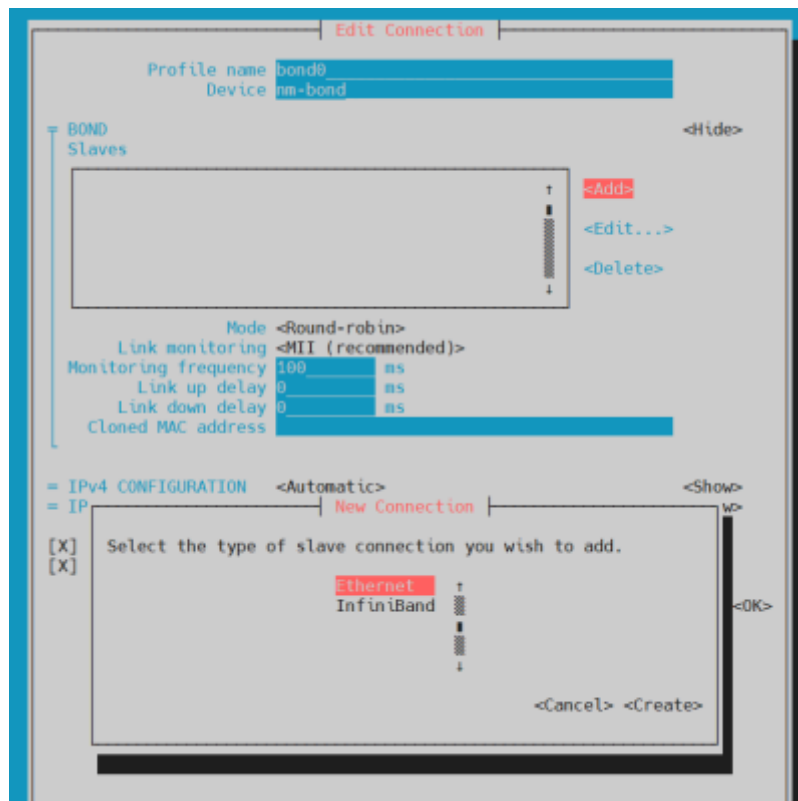

A New Connection window will open and for this example (and probably most examples) we will use the **Ethernet** option.


When the next window opens, you can specify your interface name.

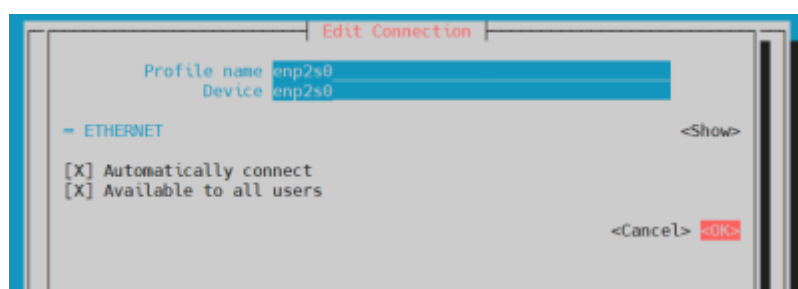

Enter the name of your first interface in your bond/team then select **<OK>**

You will now see the interface you just selected in the Slaves box. Repeat this process to add the second interface in your bond/team.

Now both interfaces are added as slaves (while in this example one interface is a master and the other a slave, both the interfaces are slaves in the bond).

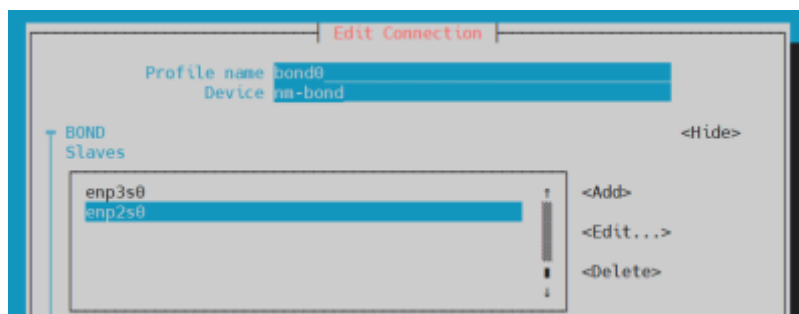

From:
<https://wiki.alanwalker.uk/> - WalkerWiki - wiki.alanwalker.uk

Permanent link:
https://wiki.alanwalker.uk/doku.php?id=wiki:interface_team_or_bond_with_nmtui&rev=1645473676

Last update: **2023/03/09 22:35**

